

QMATEC 507 TSX

ANCHORING/MULTIPURPOSE TERRAIN RIG



qmatec

MACHINE

Engine Model	Deutz TCD 4.1 Stage V
Engine Power	115 kW
Tractive Power	33 000 Nm
Track Width	500 mm
Weight std. from	10 000 kg

MAST

Feed Stroke	4600 mm
Feed Force	3 500 kg
Retract Force	7 000 kg
Mast Winch	N/A kg
Drill Table, break out clamps	∅220 mm
Mast Displacement	1000 mm
Mast turn sideway	+/-90 deg.
Rapid Pull up	0,60 m/sec

HYDRAULIC TOPHAMMER


Model	Eurodrill HD4010
-------	------------------

ROTATION HEAD for DTH

Torque	Alt. 2: 2 800 / 5 600 Nm
Rotation Speed	Alt. 2: 0-110 / 0-50 rpm
Spindle Threads	API 2 7/8" IF - API2 3/8" REG

OTHER

Oscillation on Tracks	+/-15 deg.
Track Speed	2,5 / 4,0 km/h
Battery	2 x 75 Ah
Hyd. tank	320 L
Diesel Tank	190 L

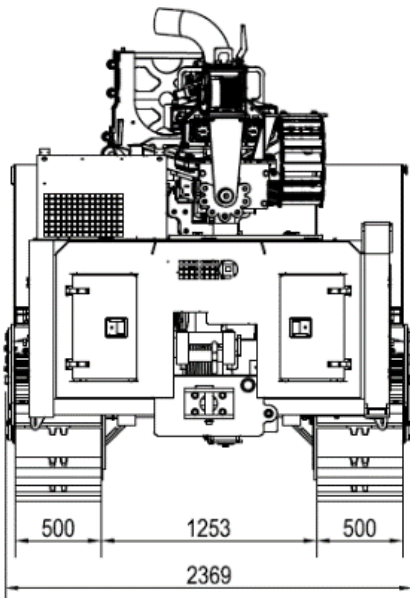

SELECTION OF OPTIONAL EQUIPMENT

Main Winch, 6700 kg

Rubber pads

Extra Pipe Rack

Welding Machine and Water Pumps

Water Tanks / Tool Cabinets

Pneumatic Grinder for bits

Support Legs for Horizontal Drilling

Crane 2.7 tm, Radio Operated

Other Equipment Delivered acc. to Agreement

