


# QMATEC 4530TS

FOUNDATION RIG WITH EXTENDABLE UNDERCARRIAGE

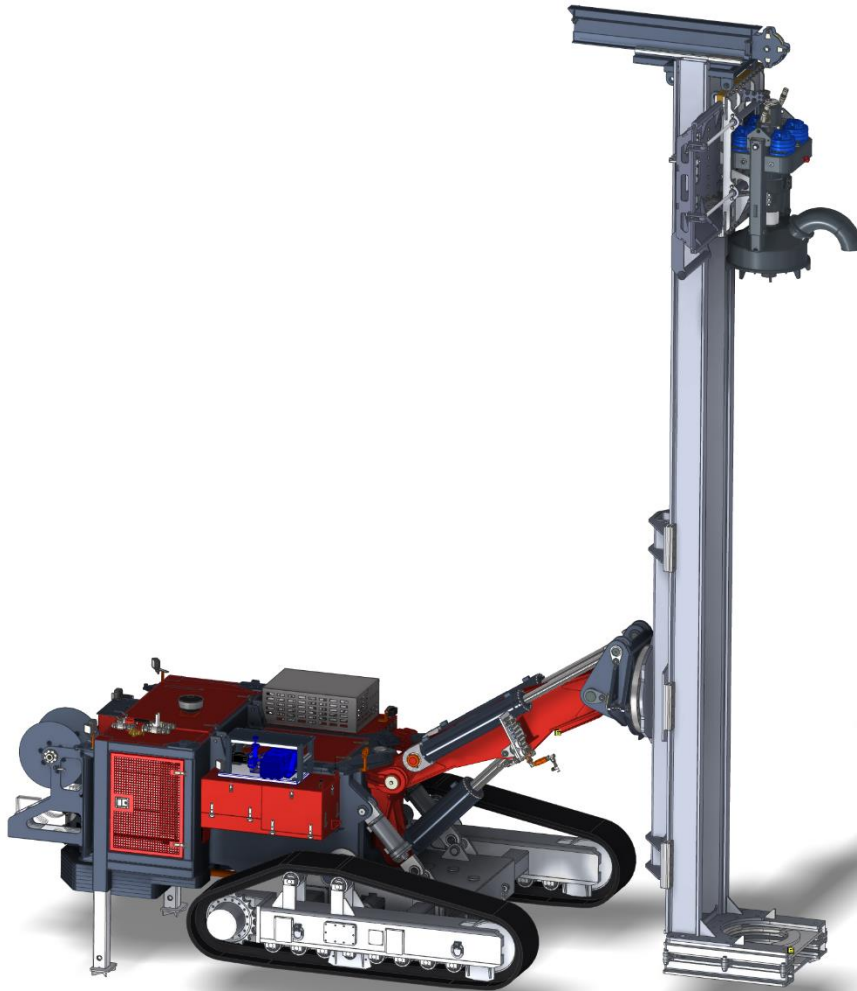

**MACHINE**

Engine Model	Deutz TCD 6.1 Stage V
Engine Power	180 kW
Tractive Power	33 000 Nm
Track Width	500 mm
Weight std. from	30 000 kg

**MAST**

Feed Stroke	7 000 mm
Feed Force	14 000 kg
Retract Force	30 000 kg
Mast Winch	1500 / 4000 kg
Drill Table	Ø750 / Ø850 mm
Mast Displacement	1500 mm
Rapid Feed	0,4 m/sec
Rapid Pull up	0,4 m/sec
Pipe Wrench Cylinder	Ø 90 mm
Mast Rotation	+/- 45 deg.

**ROTATION HEAD**

Torque	7 000 / 45 000 Nm
Rotation Speed	0-63 / 0-18 rpm
Spindle Threads	API 5-1/2" IF

**OTHER**

Oscillation on Tracks	+/- 45 deg.
Track Speed	2,5 / 4,0 km/h
Battery	2 x 75 Ah
Hydr. Tank	430 L
Diesel Tank	360 L

**SELECTION OF OPTIONAL EQUIPMENT**

Main Winch 6700 kg.

Break-Out Clamps

Welding Machine/Generator and Water Pumps

Water Tanks / Tool Cabinets

Crane 2.7 tm or 4 tm, Radio Operated

Digital Inclinometer w/Display on Radio

Lubrication System

Side-Parking for Rotation Head

Other Equipment Delivered acc. to Agreement

